



# Bullet

BCE-140OB3-32G 2MP WDR Vari-focal Network Camera

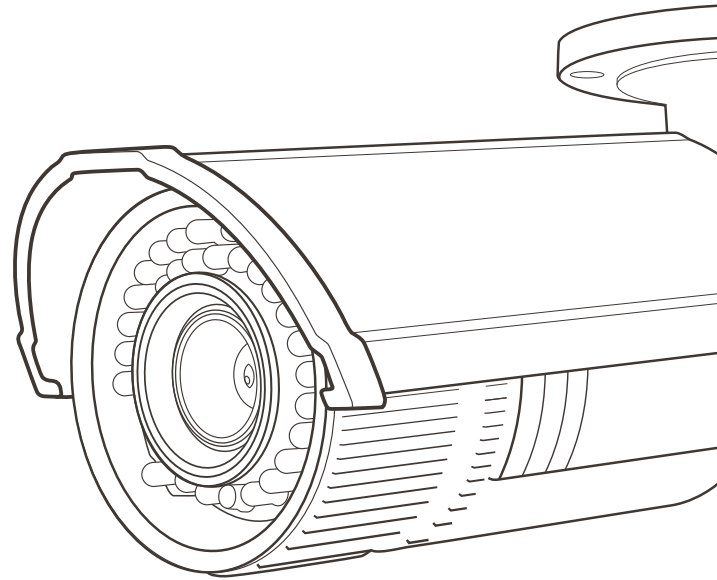

## Features

- 1/2.8" Progressive Scan CMOS
- Up to 1080p Resolution
- 120dB WDR
- 3D DNR
- Motorized lens 2.8-12mm
- Approx. 30m IR Range
- VIAAS Secure Cloud Storage, Navigation and Administration
- Built-in Micro SD/SDHC/SDXC card slot, up to 128 GB
- Audio input
- PoE (802.3af Class3) or 12V DC±25%
- H.264 Video Compression
- IP67

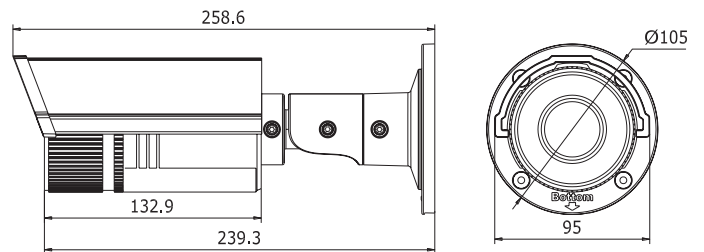

Unit: mm

## Specifications

| Camera            |   |
|-------------------|---|
| Image Sensor      | 1/2.8" Progressive Scan CMOS                                      |
| Min. Illumination | 0.01Lux @ (F1.2,AGC ON), 0.014 Lux @ (F1.4,AGC ON), 0 Lux with IR |
| Shutter Speed     | 1/3s to 1/100,000s  |
| Slow Shutter      | Supported   |
| Lens              | 2.8 - 12 mm @ F1.4, motorized lens, angle of view: 106°~35°       |
| Lens Mount        | Φ14   |
| Day & Night       | IR cut filter with auto switch                                    |
| WDR               | 120dB   |

| Compression       |                 |
|-------------------|-----------------|
| Video Compression | H.264           |
| H.264 Type        | Main Profile    |
| Video Bit Rate    | Up to 2Mbps     |
| Audio             | G.711 at 64kbps |

| Image            |  |
|------------------|--|
| Max Resolution   | 1920 × 1080  |
| Max Frame Rate   | 60Hz: <i>Main stream</i> : 30fps (1920×1080, 1280×720)<br><i>Sub stream</i> : 30fps (352×240, 640×360) |
| Enhancement      | BLC/3D DNR/ROI   |
| Settings         | Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser  |
| Day/Night Switch | Auto   |

| Network           |  |
|-------------------|--|
| Storage           | VIAAS Secure Cloud, Built-in Micro SD/SDHC/SDXC card slot, up to 128 GB (32GB is included)                         |
| Detection         | Motion detection, Dynamic analysis   |
| Alarm Trigger     | Tampering alarm, Network disconnect, IP address conflict, Storage exception  |
| Protocols         | VIAAS Cloud  |
| General Functions | One-key reset, Anti-Flicker, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering |
| Standard          | ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI   |

| General              |  |
|----------------------|--|
| Interface            | 1 RJ45 10M/100M Ethernet interface   |
| Operating Conditions | -30°C – 60°C (-22°F – 140°F), Humidity 95% or less (non-condensing)                |
| Power Supply         | PoE (802.3af Class3) or 12V DC±25%; Max. 5.5 W (Max. 7.5W with IR illumination on) |
| IR Range             | Approx. 30 meters  |
| Material             | Body, sunshield, bracket: Metal; Front cover: Glass                                |
| Ingress Protection   | IP67 - Weatherproof, IK10 - Vandal Resistant                                       |
| Dimensions           | 95 × 105 × 258.6mm (3.74" × 4.13" × 10.18")  |
| Weight               | 1200g (2.65lbs)  |